



PurgeDome

Explosion-Proof Camera System

UL Class 1- Division 2 Certified, Moog Videolarm's PurgeDome Explosion Proof camera system provides a highly effective solution for monitoring activity in explosive/hazardous environments. Operating on a supply of compressed air or inert gas, the PurgeDome system regulates the pressure within the sealed camera enclosure, protecting it from extremely hazardous fumes or gases, which could ignite in a violent explosion.

Key Features

- UL approved for hazardous locations (Class 1/Division 2)
- Certified to UL NFPA 496 Purged and Pressurized enclosures for electrical equipment and to UL NFPA 60950-1 for information technology equipment
- 36x optical zoom and 12x digital zoom (432x Total)
- Auto focus, high-res integrated day/night IR sensitive camera/lens package
- IP66 Rating for water and dust ingress
- 360° continuous rotation
- 16 user selectable privacy zones
- Integrated power box, 110/220VAC input
- Filter-regulator with pressure gauge provides clean, protective gas to the enclosure
- Differential pressure gauge indicates internal pressure



PURGEDOME_

IP Ready (Network) Digital PTZ:

EXPDWCN

Purged dome camera system for hazardous environments, IP network PTZ camera with 36x zoom lens, day/night, MPEG-4 & MJPEG video compression format, Full D1. 110/220VAC input. The product includes the camera, power box, purge box and a 100 ft. (30.5m) of hose to connect purge box to power box.

Analog PTZ:

EXPDWCS

Purged dome camera system for hazardous environments, analog PTZ camera with 36x zoom lens, day/night, RS422 communication, Moog Videolarm, Pelco P&D protocols. 110/220VAC input. The product includes the camera, power box, purge box and a 100 ft. (30.5m) of hose to connect purge box to power box.

PURGEDOME: UL HAZARD CLASSIFICATIONS:

Class 1 / Division 2

Where ignitable concentrations of flammable gases, vapors or liquids are not likely to exist under normal operating conditions.


Ignition Capability – Groups C & D

- Ethylene • Propane

Protection Methods

Purged/pressurized (Type Z) with US NFPA 496 Certification.

Purge System Specifications	
System Dimensions:	16.6" x 16" x 6.7"
Weight:	10 lbs.
Temperature Range:	-20°F to 120°F (-29°C to 49°C)
Supply Pressure Range:	5 - 120 psi
Supply Requirements:	Clean air or inert gas
Safe Pressure (CI/CII):	0.25/1.0
Safe Pressure Flow Rate:	0.1 - 3.5 SCFH
System Supply Fitting:	s" tube fitting
Enclosure Supply Fitting:	s" tube fitting
Enclosure Reference Fitting:	¼" tube fitting
Switch Setting (CI/CII):	0.15 / 0.5 + 0.02
Switch Conduit Port Size:	½" FPT
Switch Contact Rating:	120VAC, 15A

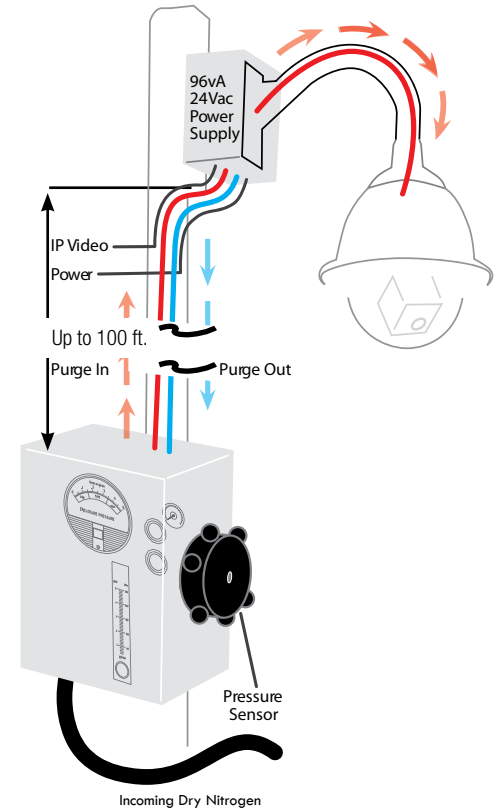

SPECIFICATIONS:

Camera Specifications

Image Sensor:	¼" interline transfer CCD
Number of Effective Pixels:	360,000 pixels, 724 (H) x 494 (V)
Resolution:	470 (H) x 400 (V) TV lines
Lens:	36x optical, (f=3.6mm - 82.8mm)
Digital Zoom:	12x (432x with optical zoom)
Angle of View:	(H) 54° (wide end) to 2.5° (tele end)
Minimum Illumination:	Color: 3 lux @ 1/60s, .2 lux @ ¼S
	B&W: 0.02 lux (¼S, IR cut filter removed)
S/N Ratio:	50 dB

PTZ Pan/Tilt/Zoom Mechanism

Pan Movement:	360° Continuous pan rotation
Vertical Tilt Unobstructed:	0° to -90°
Manual Speeds:	Pan: .05°-80°/sec manual operation
Preset Speeds:	Pan: 120°/sec
	Tilt: 120°/sec
Positioning:	+/- .05 degree
Construction:	Aluminum
Gearing:	Belt-driven, ¼" wide
Bearings:	Precision ball bearings, and permanently lubricated bushings

Mechanical Specifications

Size:	Camera:	14.4" x 11.2" x 11.2"	(366 x 285 x 285mm)
	Power Box:	2.3" x 8.7" x 5.7"	(374 x 208 x 369mm)
Weight:	25 lbs (11.4kg)		

Electrical Specifications

Power Requirements:	110/120VAC, 15A
---------------------	-----------------

Environmental Specifications

Operating Temperature:	-20° F to 104° F	(-29° C to + 49° C)
------------------------	------------------	---------------------

Network Specifications

Network Interface:	10/100 Base-T Ethernet
Image Compression:	MPEG-4 Simple Profile (SP); JPEG; MJPEG

Certifications and Ratings

		
UL Listed	WEEE	IP66 Rating

